


# HV 120 V

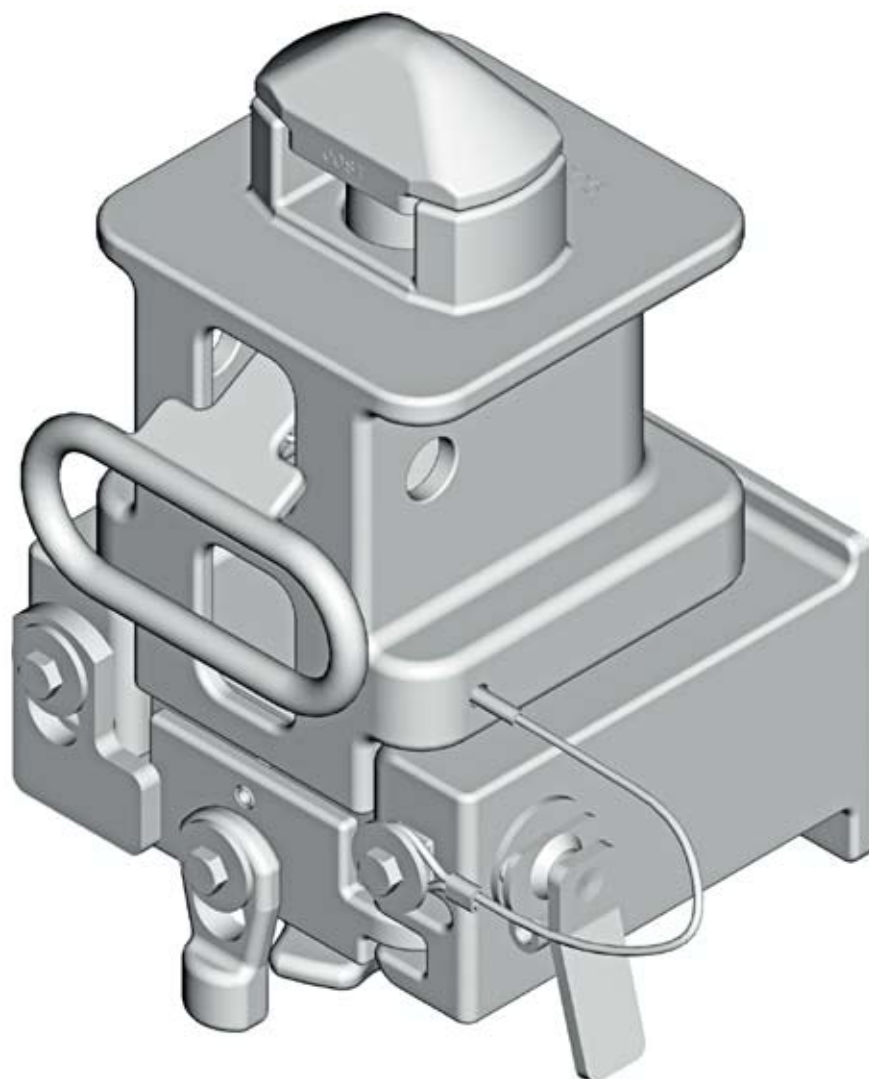

[www.jost-world.com](http://www.jost-world.com)


## HV 120 V

- Compact installation dimensions
- Weight-optimised:  
Total weight only 25 kg
- One model for all positions
- All mounting components ready to be installed, with final coating
- Spring-loaded handle for easy, safe handling
- Secured three times, independently:  
Pin bolt, latch and security rope
- Pin bolt, undetachable
- Height 120 mm, braced in weld-on housing tightened


**JOST**

# HV 120 V


## Technical specifications

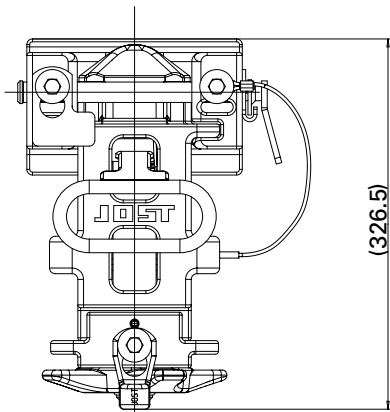

Lowered position

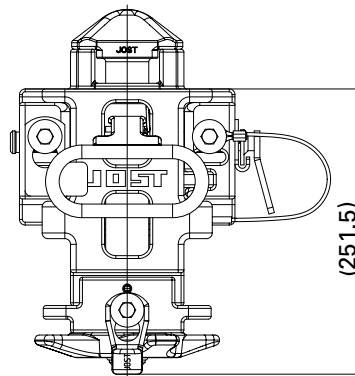


Position 0 mm

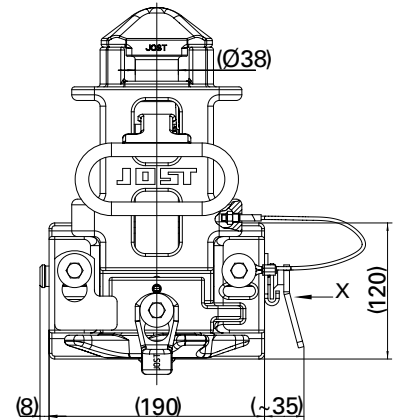

Position 120 mm

## Locks on the gooseneck chassis

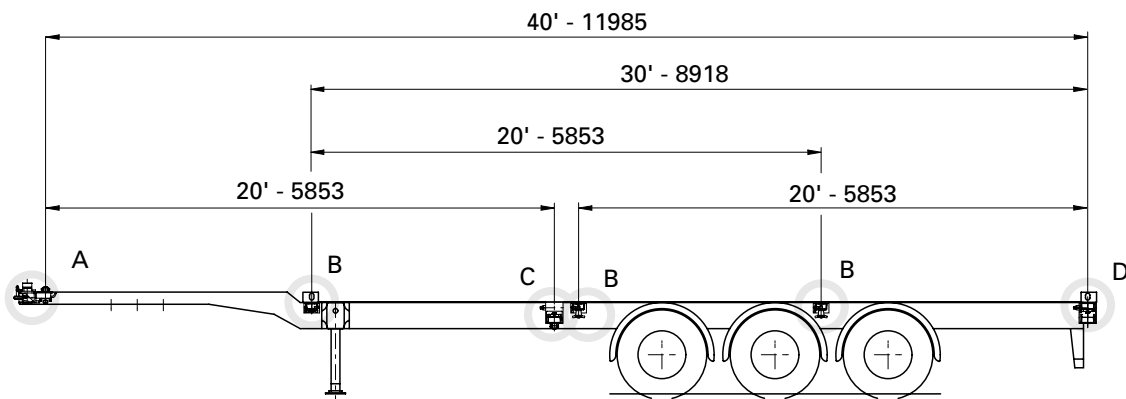

- HV 120V can be built into the positions C and D chassis
- There are different positions for the HV 120V, depending on how the chassis is loaded:
  - Loaded with 40/(45)' tunnel container (and 30' standard container): Pos. C – lowered; Pos. D – height 0
  - Loaded with a 40' – standard container: Pos. C – lowered; Pos. D – height 120
  - Loaded with 2x 20' – standard container: Pos. C – height 120; Pos. D – height 0
  - Loaded with 1x 20' – standard container, in the middle: HV 120V: Pos. C – lowered; Pos. D – position can be set as desired

| Weight (kg) | Order No. | Drawing No. |
|-------------|-----------|-------------|
| 24.5        | HV 120V   | 950.670.000 |

More information regarding our range of products can be found at [www.jost-world.com](http://www.jost-world.com)

